

B Vent Fireplace Systems



7000 Series 724BV4536 and 724BV5142 B Vent Gas Fireplaces

- Only B Vent fireplace of this size that allows operation with the optional bi-fold brass or black doors closed (doors required on propane models)
- Massive logs and glowing emberbed provide radiant warmth
- Extra large viewing areas
 - 36" x 26" (936 sq. ins.)
 - 42" x 26" (1092 sq. ins.)
- Radiant "Clean Face" design
- Available in millivolt control with standing pilot or electronic ignition in natural gas or propane gas
- Thermal operated safety shut off activates if flue pipe is blocked
- Drywall mounting flanges allow for easier and faster installation of drywall
- 8" B Vent pipe allows for maximum installation flexibility and cost effectiveness versus woodburning pipe and installation restrictions
- 15 feet of wire for wall switch installation

- 30" flexible connector with on/off valve
- Manual on/off damper control
- 100% factory leak tested and operated
- CSA design certified

*Heat with
Personality.*

MONESSEN
HEARTH SYSTEMS

OPTIONAL ACCESSORIES & SPECIFICATIONS

Product Specifications												
Model	Width		Height		Depth		BTU/H NAT	BTU/H LP	Viewing Area (Sq. In.)	Opening Dimension (W x H x D)	Radiant or Circulating	Design Certified
	Actual	Framing	Actual	Framing	Actual	Framing						
724BV4536	45"	45-1/4"	44-1/8"	48"	23 1/2"	23 5/8"	50,000	50,000	936	36" x 26" x 18-1/2"	Radiant	CSA
724BV5142	51"	51-1/4"	44-1/8"	48"	23 1/2"	23 5/8"	50,000	50,000	1092	42" x 26" x 18-1/2"	Radiant	CSA



724BV4536 Gas Fireplace shown with optional cottage clay firebrick and polished brass bi-fold glass doors.



724BV5142 Gas Fireplace shown with optional cottage clay firebrick and polished brass bi-fold glass doors.

Optional Accessories:

- Decorative Black Mesh Screen
- Cottage Clay or Cottage Red Firebrick
- Choice of doors (Required on Propane Models)
 - Polished Brass Bi-fold Glass Door (BBD4536 and BBD5142)
 - Black Bi-fold Glass Door (BLD4536 and BLD5142)
- Remote Controls and Wall Thermostats



On/Off Hand-Held Remote Control with Receiver.



On/Off Hand-Held Remote Control with 90 min. countdown timer with Receiver. LCD Display.




Touch Light™ Table Top/Wall Mount TLM On/Off Remote Control with Receiver.



Wall Thermostat

724BV4536 and 724BV5142 Framing Dimensions

	724BV4536	724BV5142
A	Front Wall Opening Width	45-1/4"
B	Front Wall Opening Height	48"
C	Back Width of Fireplace	33-1/4"
D	Width to Corner	16-3/4"
E	Corner Clearance Width	80-1/2"
F	Depth from Fireplace to Wall	40-1/4"
G	Back Wall Depth	23-5/8"
H	Corner Wall Length	57-1/2"
I	Fireplace Opening Width	36"
J	Fireplace Opening Height	26"

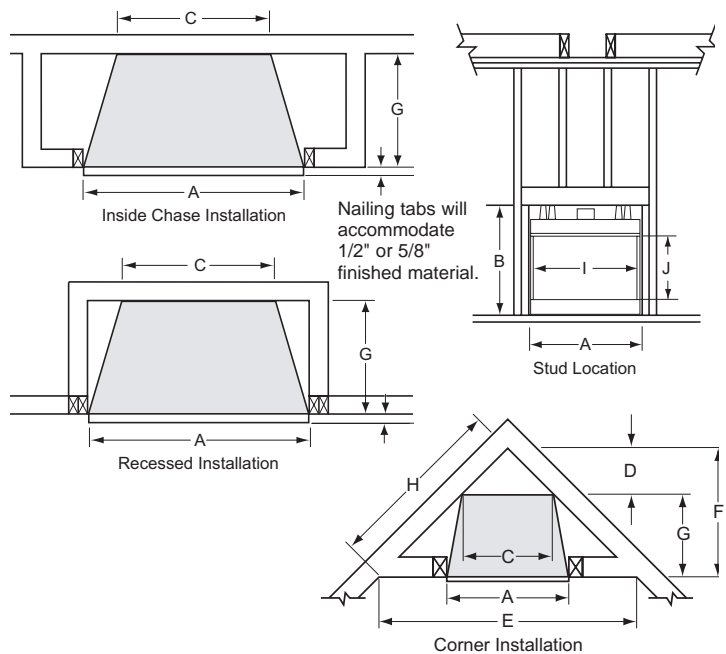

REGULATORY APPROVAL

The 7000 Series is approved to ANSI Z21.50 and approved for installation in bedrooms and aftermarket manufactured (mobile) home, where not prohibited by state or local codes.

MONESSEN

HEARTH SYSTEMS

149 Cleveland Drive • Paris, Kentucky 40361

www.monessenhearth.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.

© 2004 Monessen Hearth Systems, Inc.



7000Series-MHS4106



Warning:

- Correct installation of the gas logs and periodic cleaning are necessary to avoid potential service problems.
- Keep small children and animals away from the hot surfaces at all times.
- This appliance must not be connected to a chimney flue servicing a separate solid-fuel burning appliance.
- Common venting of this appliance with other gas appliances is not allowed.
- There may be a start-up odor associated with the heating of the logs. The odor should diminish in 2-3 hours of operation with the burner at its highest setting with the fan in the off position.
- It is recommended to open a window during burn off period.

Sold by: