

SPECIFICATIONS

FIELD INSTALLED ACCESSORIES

Steel Stove

- Thermostat control bulb sensor for millivolt model only
- Variable speed thermostatically controlled blower
- Gold-plated door frame with screen

Cast Stoves

- Variable thermostat controlled forced air blower (135 cfm)
- Warming shelf available in graphite, enamel black, enamel sand and enamel brown

Millivolt Control Only



7-Day Programmable On/Off Wireless Wall Thermostat, Battery or 110 Receiver.



Touch Light™ Table Top/Wall Mount TLM On/Off and TLT Thermostat Remote Control with Receiver.



Hand Held On/Off Remote Control. Standard or Hi/Lo Flame Adjustable Operation.



Hand Held Thermostat Remote Control with Receiver. Standard or Hi/Lo Flame Adjustable Operation.



CSVF30 Vent Free Cast Iron Stove shown with optional warming shelves.

CAST STOVE COLOR OPTIONS



Graphite



Enamel Black



Enamel Brown



Enamel Sand

SPECIFICATIONS

Product Specifications								
Model	Product Dimensions			Millivolt Control BTU		Approx. Heating Area/ Sq. Ft.	Approx. Cost to Operate per hour* Low-High	Design Certified
	Width	Height	Depth	NG	LP			
DSS	27"	32"	17"	18,000-28,000	20,000-28,000	950	18¢-28¢	CSA
CSVF20	21-1/4"	23"	16-1/2"	7,000-10,000	7,000-10,000	500	7¢-10¢	CSA
CSVF30	26-3/4"	28-1/2"	19-3/4"	23,000-32,000	23,000-32,000	1500	23¢-32¢	CSA

* Based on 2003 Dept. of Energy Costs for lowest and highest Btu operation.



CSVF30 Vent Free Cast Iron Stove (Graphite)



CSVF20 Vent Free Cast Iron Stove (Enamel Sand)



DSS Vent Free Steel Stove shown with standard black doors


CLEARANCES

	DSS	CSVF20	CSVF30
Side Wall	6"	1"	2"
Backwall	6"	1/2"	1"
Adjacent Wall Corner	4"	1-1/2"	1/2"
Top of Stove to Mantel	28"	16"	18"


PRODUCT DIMENSIONS

	DSS	CSVF20	CSVF30
A	27"	21-1/4"	26-3/4"
B	32"	23"	28-1/2"
C	17"	16-1/2"	19-3/4"

CSVF Stove

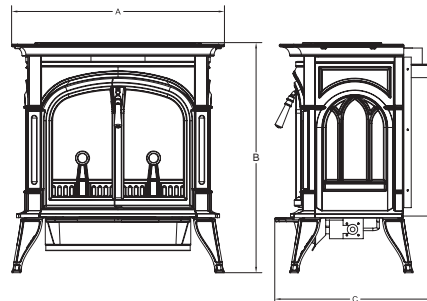

DSS Stove

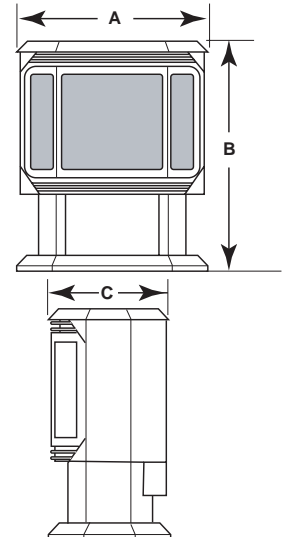

REGULATORY APPROVAL

The DSS and CSVF vent free stoves have been tested and approved by CSA as an unvented room heater to the latest ANSI Z21.11 requirements. Approved for installation in an aftermarket manufactured (mobile) home, where not prohibited by state or local codes.

Warning:

- Correct installation of the ceramic fiber logs, proper location of the heater, and periodic cleaning are necessary to avoid potential service problems with sooting.
- Keep small children and animals away from the open flame of the gas log set at all times
- There may be a start up odor associated with the heating of the unit. The odor should diminish in 2-3 hours of operation with the burner at its highest setting.
- It is recommended to open a window during burn off period.

MONESSEN HEARTH SYSTEMS

149 Cleveland Drive • Paris, Kentucky 40361
www.monessenhearth.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.

© 2004 Monessen Hearth Systems, Inc.



MADE IN U.S.A.
 DSSCSVF-MHS4804



Sold by: